


S9720-56ED

800G DISAGGREGATED CORE AND EDGE ROUTER

The UfiSpace S9720-56ED is a 18 x 800G disaggregated open router that evolves the network to a 800G network, which enables next generation of 5G services and applications. The S9720-56ED can be deployed as a standalone device or within a core switching cluster as a "line card" element within the distributed disaggregated chassis.

As a standalone router, the S9720-56ED can be deployed at the edge network to enable transport services over a scalable next generation Telecom network. It is also suitable for central office data centers and general network aggregation. When coupled with UfiSpace's fabric switch, the S9720-56ED becomes a building block for the distributed disaggregated chassis (DDC). The DDC allows network service providers to implement a pay-as-you-grow model when scaling core network capacities with a S9720-56ED cluster scaling up to 921.6Tbps.

The S9720-56ED disaggregated core router uses the Broadcom J3 chipset, which provides 16GB deep buffering and 14.4Tbps switching capacity. As a core router, the S9720-56ED enables fault and performance monitoring, non-stop routing support for control and data plane, and comprehensive high-availability networks.

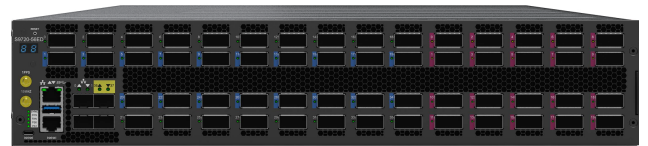

KEY BENEFITS

- Accelerated table lookup, packet buffering, and control memory with low latency high bandwidth memory
- Flexible and programmable packets processor
- Individual BMC for monitoring and managing health status
- High density ports with low power consumption
- Transparent networking, interoperability with S9705-48D, S9700-53DX, S9700-23D, S9710-76D and S9710-82DC
- Upstream connectivity management supported by flexibly configured fabric pipes
- Dynamic distribution and routing through automatic fault detection and recovery

KEY FEATURES

- Dense, high capacity 400/800G service ports
- Fabric ports allow for horizontal scaling of network capacity
- Pay as you grow model for capacity increase
- 16GB deep buffering and Intel Icelake-D 8-Core @ 2.1GHz
- Hardware supports full SyncE and IEEE1588v2 (T-TC, T-BC/OC)
- Hot swappable power supplies with 1+1 redundancy support
- Hot swappable fan modules with 3+1 redundancy support

SPECIFICATIONS

PHYSICAL

♦ 18 x 100/200/400/800G or 36 x 100/200/400G QSFP-DD service ports with 400G ZR/ZR+ support	
♦ 20 x 800G QSFP-DD fabric ports	
♦ 1 x RJ45 & Micro USB serial console ports	
♦ 2 x 10G SFP+ management ports	
♦ 1 x 100/1000M RJ45 management port	
♦ 1 x USB 3.0 Type-A port	
Processor	Intel Icelake-D 8-Core @ 2.1GHz
Memory	64GB DDR4 (Up to 128GB)
Storage	2x 256GB M.2 SSD
ASIC	Broadcom Jericho3 BCM88860
BMC	AST2620
Timing Interfaces	1 x 10MHz input/output SMB 1 x 1PPS input/output SMB
Timing Support	Stratum 3E OCXO ITU-T Synchronous Ethernet (SyncE) IEEE 1588v2 - Default, G.8265.1 G.8275.1, G.8275.2, SMPTE ST 2059-2+ „, T-BC/OC, T-TC
Chassis (WxDxH)	2 RU, 436 x 762 x 87.7 mm or 17.17" x 30" x 3.45" Weight: 33 kg (72.75 lbs)
Redundancy	Hot-swappable, 1+1 Redundant PSU Hot-swappable, 3+1 Redundant fans

*NOS integration is necessary to activate the specific feature.
**Additional license is required

S9720-56ED

Telecom
Networking
Solutions

ENVIRONMENTAL

Power Specs.	AC input: 200 to 240V, 16A
	DC input: -40 to -72V, 80A
	Typical power: 920.6 Watts (no transceiver)
Max. Operating Specs.	Operating temperature: 0°C to 45°C (32°F to 113°F)
	Operating humidity: 5% to 85% (RH), non-condensing
Max. Non-Operating Specs.	Storage temperature: -40°C to 70°C (-40°F to 158°F)
	Storage humidity: 5% to 93% (RH), non-condensing

PERFORMANCE

Switching Capacity	14.4Tbps
Deep Buffer	16GB

REGULATORY COMPLIANCE

Safety	UL 62368-1 IEC 62368-1	EMC	FCC Part 15B, Subpart B, Class A
Environment	WEEE		

Specifications are subject to change without notice.
Contact our sales team for current configuration options.

S9720-56ED Front and Rear Views



ACCESSORIES

- Compatible Transceiver Types
800GE QSFP-DD OpenZR+, 800GE QSFP-DD ZR, 800GE QSFP-DD 2xLR4, 800GE QSFP-DD 2xFR4, 800GE QSFP-DD DR8+, 800GE QSFP-DD DR8, 800GE QSFP-DD SR8, 400GE QSFP-DD OpenZR+, 400GE QSFP-DD ZR, 400GE QSFP-DD ER4, 400GE QSFP-DD LR4, 400GE QSFP-DD FR4, 400GE QSFP-DD SR8, 400GE QSFP-DD DR4, 400GE QSFP-DD DR4+, 400GE QSFP-DD PLR4, 200GE QSFP56 SR4, 200GE QSFP56 FR4, 100GE QSFP28 ZR4, 100GE QSFP28 ER4, 100GE QSFP28 SR4, 100GE QSFP28 LR4
- Compatible Fabric Cable Types
800GE QSFP-DD AEC (Active Electrical Cable), 800GE QSFP-DD DAC (Direct Attach Cable), 800GE QSFP-DD ACC (Active Copper Cable), 800GE QSFP-DD AOC (Active Optical Cable)
- Compatible Timing Cable Types
SMB coaxial cable with 10-32UNF-2A connector for 1PPS and 10MHz
- Available to Order
- Power Supply Types
PSU-302-DESR, 3000W DC, exhaust air flow
PSU-302-AESR, 3000W AC, exhaust air flow
- Fan Types
FAN-808012-HCE, exhaust air flow

